


SPECS + PRE-INSTALLATION REQUIREMENTS FOR THE 2024-SEPT

ARDUINO VA358 WHITE EAGLE 3-GROUP DIGIT

ELECTRICAL REQUIREMENTS

- ☐ 220 VOLTS / 30 AMPS (5200W / 24A)
- ☐ NEMA L6-30 TWIST receptacle ①
- ☐ Standard 110 VOLT receptacle within 2' (60cm) of Grinder(s)



WATER REQUIREMENTS


- ☐ 1/2" dedicated COLD water line with shut-off valve and 3/8" compression fitting ②
- ☐ SHUT-OFF ② MUST ALWAYS BE EASILY ACCESSIBLE IN CASE OF EMERGENCY
- ☐ Water softening is mandatory with hardness >3 GPG (50ppm). Zuccarini installs a BWT in-line water softener④ but with hardness >12 GPG (200ppm) you must install a central Softening/Reverse Osmosis (RO) system AND maintain 2-4 BARS water pressure at machine.

- ☐ SPECS: Water flow rate: 1GPM / TDS: 50-250ppm / Alkalinity: 10-150ppm / Chlorine: <0.50ppm / PH: 6.5-8.5 / Filtration: <1.0 micron

DRAINAGE REQUIREMENTS


- ☐ Minimum 1.5" (or 3.5 cm) diameter open gravity drain within 3' (1 metre) of machine ③
- ☐ Drain hose (we provide) must always run DOWNWARDS (never bending upwards) or it will clog

COUNTER SPACE REQUIREMENTS
 Width: 41.5" (106cm) Depth: 26" (66cm)
 Height: 20" (51cm) Weight: 200lb (91kg)

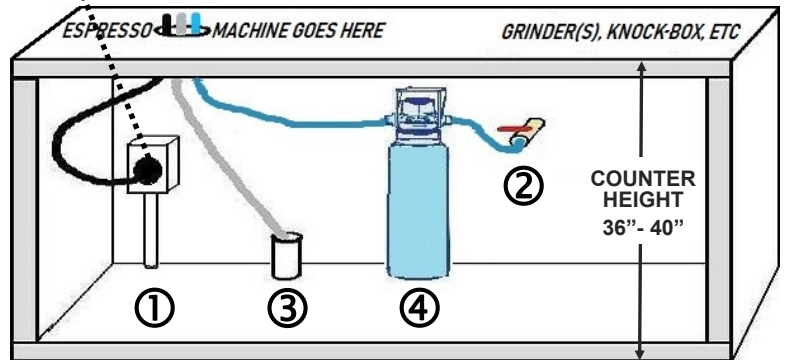

COUNTER REQUIREMENTS

- ☐ Minimum 2.5" (7cm) in the counter beneath the machine for power supply, cold water & drain hose:
 - hole should be directly in the center of the machine or slightly center/back
 - IF YOUR COUNTER-TOP IS MADE OF STONE OR METAL, THE HOLE MUST BE DRILLED BEFORE OUR TECHNICIAN ARRIVES TO INSTALL YOUR MACHINE
- ☐ Leave space under the counter between cold water shut-off ② and espresso machine for Water Softener④ (max. 30" x 8" x 8" / 75x20x20cm vertical OR horizontal) which must be accessible for regular replacement
- ☐ Allow a minimum 4" (10cm) of workspace for Technician beside machine for service access
- ☐ We suggest that you allow a minimum of 8" (20cm) of workspace for Barista in front of machine PLUS space for Espresso Grinder(s) and a Knock Box, etc to be placed on or installed into counter-top beside machine (right or left)
- ☐ The suggested counter height is 36" to 40" (1 metre); if taller, it is suggested you install/place a step or riser for staff to stand on
- ☐ Allow a min. 12" (30cm) clearance above machine

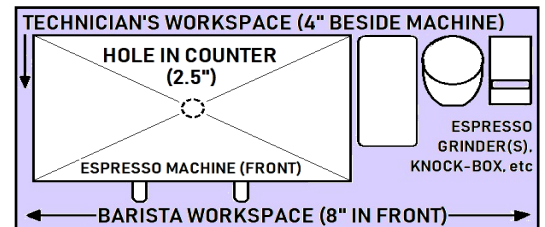

FAILURE TO HAVE SITE PREPARED AT TIME OF INSTALLATION APPOINTMENT WILL CAUSE DELAYS & RESULT IN ADDITIONAL SERVICE & TRAVEL CHARGES.