

SPECS + PRE-INSTALLATION REQUIREMENTS FOR THE ELEKTRA BELLE EPOQUE 3-GROUP

2024-SEPT

ELECTRICAL REQUIREMENTS

- ❑ 220 VOLTS / 30 AMPS (5200W / 24A)
- ❑ NEMA L6-30 TWIST receptacle ①
- ❑ Standard 110 VOLT receptacle within 2' (60cm) of Grinder(s)

WATER REQUIREMENTS

- ❑ 1/2" dedicated COLD water line with shut-off valve and 3/8" compression fitting ②
- ❑ SHUT-OFF ② MUST ALWAYS BE EASILY ACCESSIBLE IN CASE OF EMERGENCY
- ❑ Water softening is mandatory with hardness >3 GPG (50ppm). Zuccarini installs a BWT in-line water softener④ but with hardness >12 GPG (200ppm) you must install a central Softening/Reverse Osmosis (RO) system AND maintain 2-4 BARS water pressure at machine.



- ❑ SPECS: Water flow rate: 1GPM / TDS: 50-250ppm / Alkalinity: 10-150ppm / Chlorine: <0.50ppm / PH: 6.5-8.5 / Filtration: <1.0 micron

DRAINAGE REQUIREMENTS

- ❑ Minimum 1.5" (or 3.5 cm) diameter open gravity drain within 3' (1 metre) of machine ③
- ❑ Drain hose (we provide) must always run DOWNWARDS (never bending upwards) or it will clog


COUNTER SPACE REQUIREMENTS

Width: 27+7" (68+17cm)
Depth: 27+4" (68+11cm)
Height: 45" (115cm)
Weight: 159lb (72kg)

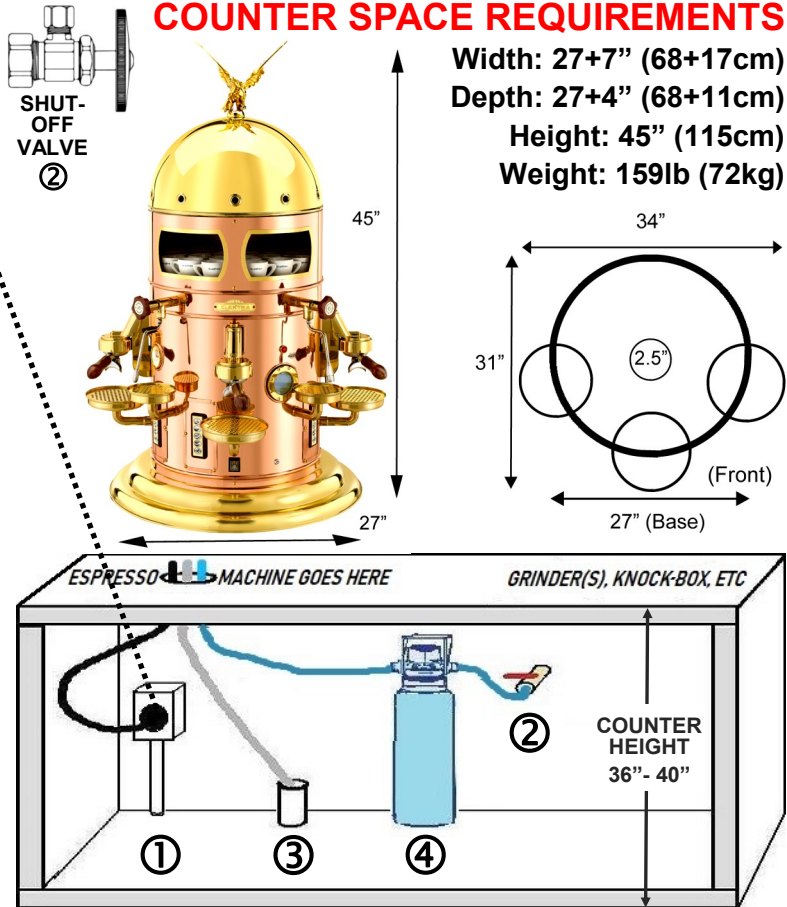

COUNTER REQUIREMENTS

- ❑ Minimum 2.5" (7cm) hole in the counter beneath the machine for power supply, cold water & drain hose:
 - hole should be left or right of the center of the machine (or slightly back left or right)
 - IF YOUR COUNTER-TOP IS MADE OF STONE OR METAL, THE HOLE MUST BE DRILLED BEFORE OUR TECHNICIAN ARRIVES TO INSTALL YOUR MACHINE
- ❑ Leave space under the counter between cold water shut-off ② and espresso machine for Water Softener④ (max. 30" x 8" x 8" / 75x20x20cm vertical OR horizontal) which must be accessible for regular replacement
- ❑ Allow a minimum 4" (10cm) of workspace for Technician beside machine for service access
- ❑ We suggest that you allow a minimum of 8" (20cm) of workspace for Barista in front of machine PLUS space for Espresso Grinder(s) and a Knock Box, etc to be placed on or installed into counter-top beside machine (right or left)
- ❑ The suggested counter height is 36" to 40" (1 metre); if taller, it is suggested you install/place a step or riser for staff to stand on
- ❑ Allow a min. 12" (30cm) clearance above machine

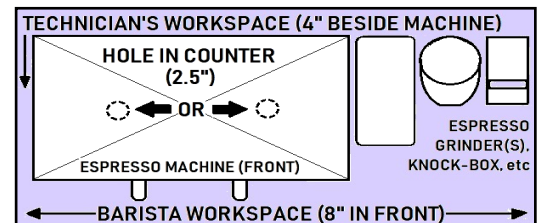

ELEKTRA  **MADE IN ITALY**

**FAILURE TO HAVE SITE PREPARED AT TIME OF INSTALLATION APPOINTMENT
WILL CAUSE DELAYS & RESULT IN ADDITIONAL SERVICE & TRAVEL CHARGES.**



**ESPRESSO
MACHINES**

NO. 1335 DAVENPORT ROAD
TORONTO, ONTARIO M6H 2H4

416-537-3439

service@zuccarini.ca
ZUCCARINI.CA