# SPECS + PRE-INSTALLATION REQUIREMENTS FOR THE 2024-SEPT SIMONELLI AURELIA WAVE 2-GROUP "T3"

#### ELECTRICAL REQUIREMENTS

□ 220 VOLTS / 50 AMPS (7000W / 32A)

□ NEMA L6-50 receptacle①

□ Standard 110 VOLT receptacle within 2' (60cm) of Grinder(s)

#### WATER REQUIREMENTS

 $\Box$  1/2" dedicated COLD water line with shut-off valve and 3/8" compression fitting O

□ SHUT-OFF ② MUST ALWAYS BE EASILY ACCESSIBLE IN CASE OF EMERGENCY


□ Water softening is mandatory with hardness >3 GPG (50ppm). Zuccarini installs a BWT in-line water softener④ but with hardness >12 GPG (200ppm) you must install a central Softening/ Reverse Osmosis (RO) system AND maintain 2-4 BARS water pressure at machine.

SPECS: Water flow rate: 1GPM / TDS: 50-250ppm / Alkalinity: 10-150ppm / Chlorine: <0.50ppm / PH: 6.5-8.5 / Filtration: <1.0 micron

# DRAINAGE REQUIREMENTS


□ Minimum **1.5" (or 3.5 cm) diameter open gravity drain** within 3' (1 metre) of machine ③

□ Drain hose (we provide) must always run DOWN-WARDS (never bending upwards) or it will clog



### COUNTER SPACE REQUIREMENTS

Width: 31.5" (80cm) Height: 21" (53cm) Depth: 24" (61cm) Weight: 176lb (80kg)

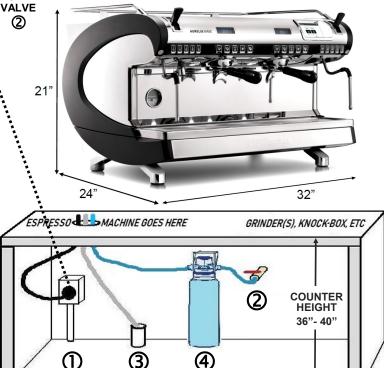

## **COUNTER REQUIREMENTS**

□ Minimum 3" (8cm) hole in the counter beneath the machine for power supply, cold water & drain hose:


- · hole should be directly in the center of the machine or slightly center/back
- IF YOUR COUNTER-TOP IS MADE OF STONE OR METAL, THE HOLE MUST BE DRILLED <u>BEFORE</u> OUR TECHNICIAN ARRIVES TO INSTALL YOUR MACHINE

 $\Box$  Leave space under the counter between cold water shut-off O and espresso machine for **Water Softener** (max. 30" x 8" x 8" / 75x20x20cm vertical OR horizontal) **which must be accessible** for regular replacement

□ Allow a minimum 4" (10cm) of workspace for Technician beside machine for service access

□ We suggest that you allow a minimum of 8" (20cm) of workspace for Barista in front of machine PLUS space for Espresso Grinder(s) and a Knock Box, etc to be placed on or installed into counter-top beside machine (right or left)

□ **The suggested counter height is 36" to 40"** (1 metre); if taller, it is suggested you install/place a step or riser for staff to stand on



□ Allow a min. 12" (30cm) clearance above machine



FAILURE TO HAVE SITE PREPARED AT TIME OF INSTALLATION APPOINTMENT WILL CAUSE DELAYS & RESULT IN ADDITIONAL SERVICE & TRAVEL CHARGES.

