

Prontobar Touch Spec Sheet

Water Requirements


- 3/8" dedicated cold water line with shut-off valve and compression fitting.
- Water hardness cannot exceed 3gpg or 50 ppm. If water hardness exceeds 3gpg a water softener must be installed.
- Minimum incoming water flow rate of 35 GPH and maximum line pressure of 36 PSI / 3 BAR - regulator not provided.

Water Softening Equipment

1. Water Softener Capacity: Single - 4400 gpg
2. Water Softener Capacity: Double - 8800 gpg
3. Water Softener Capacity: Triple - 13200 gpg
4. Water Softener Capacity: Automatic - Programmable
5. Water Softener Capacity: Manual - 4400 gpg

Power Requirements

- Volts: 220 (voltage range of 208-240)
- Watts: 2800
- Amp draw: 13
- Receptacle: Nema 6-20



Nema 6-20



NSF / ANSI Std.4


The average water consumption of this machine is 4 gallons per day, which represents 128 drinks at 4oz per drink.

Counter Space Requirements

- Height: 25 inches
- Depth: 21 inches
- Width: 13 inches

Drain Requirements

- Open gravity drain of minimum 1.25 inch I.D., within 4 feet of the machine.

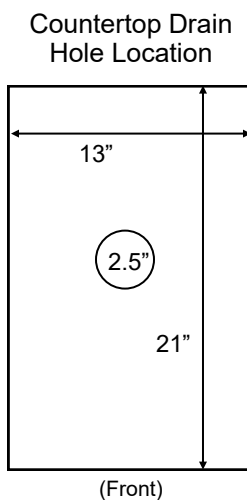

**ESPRESSO
MACHINES**

NO. 1335 DAVENPORT ROAD
TORONTO, ONTARIO M6H 2H4

416-537-3439

service@zuccarini.ca
ZUCCARINI.CA